STAINLESS INSULATION BOX

CX2009

Product Description: A high quality insulation box with outer shield of high-grade stainless steel. The high-grade stainless steel inner box is shielded with a carefully formulated composition of insulation material, which makes the combination suitable to resist high temperatures for long time.

Test Conditions: Tested in combination with the accompanying energy absorber (a high density energy-collecting media) with a system start temperature of 20°C (68°F).

Specifications:

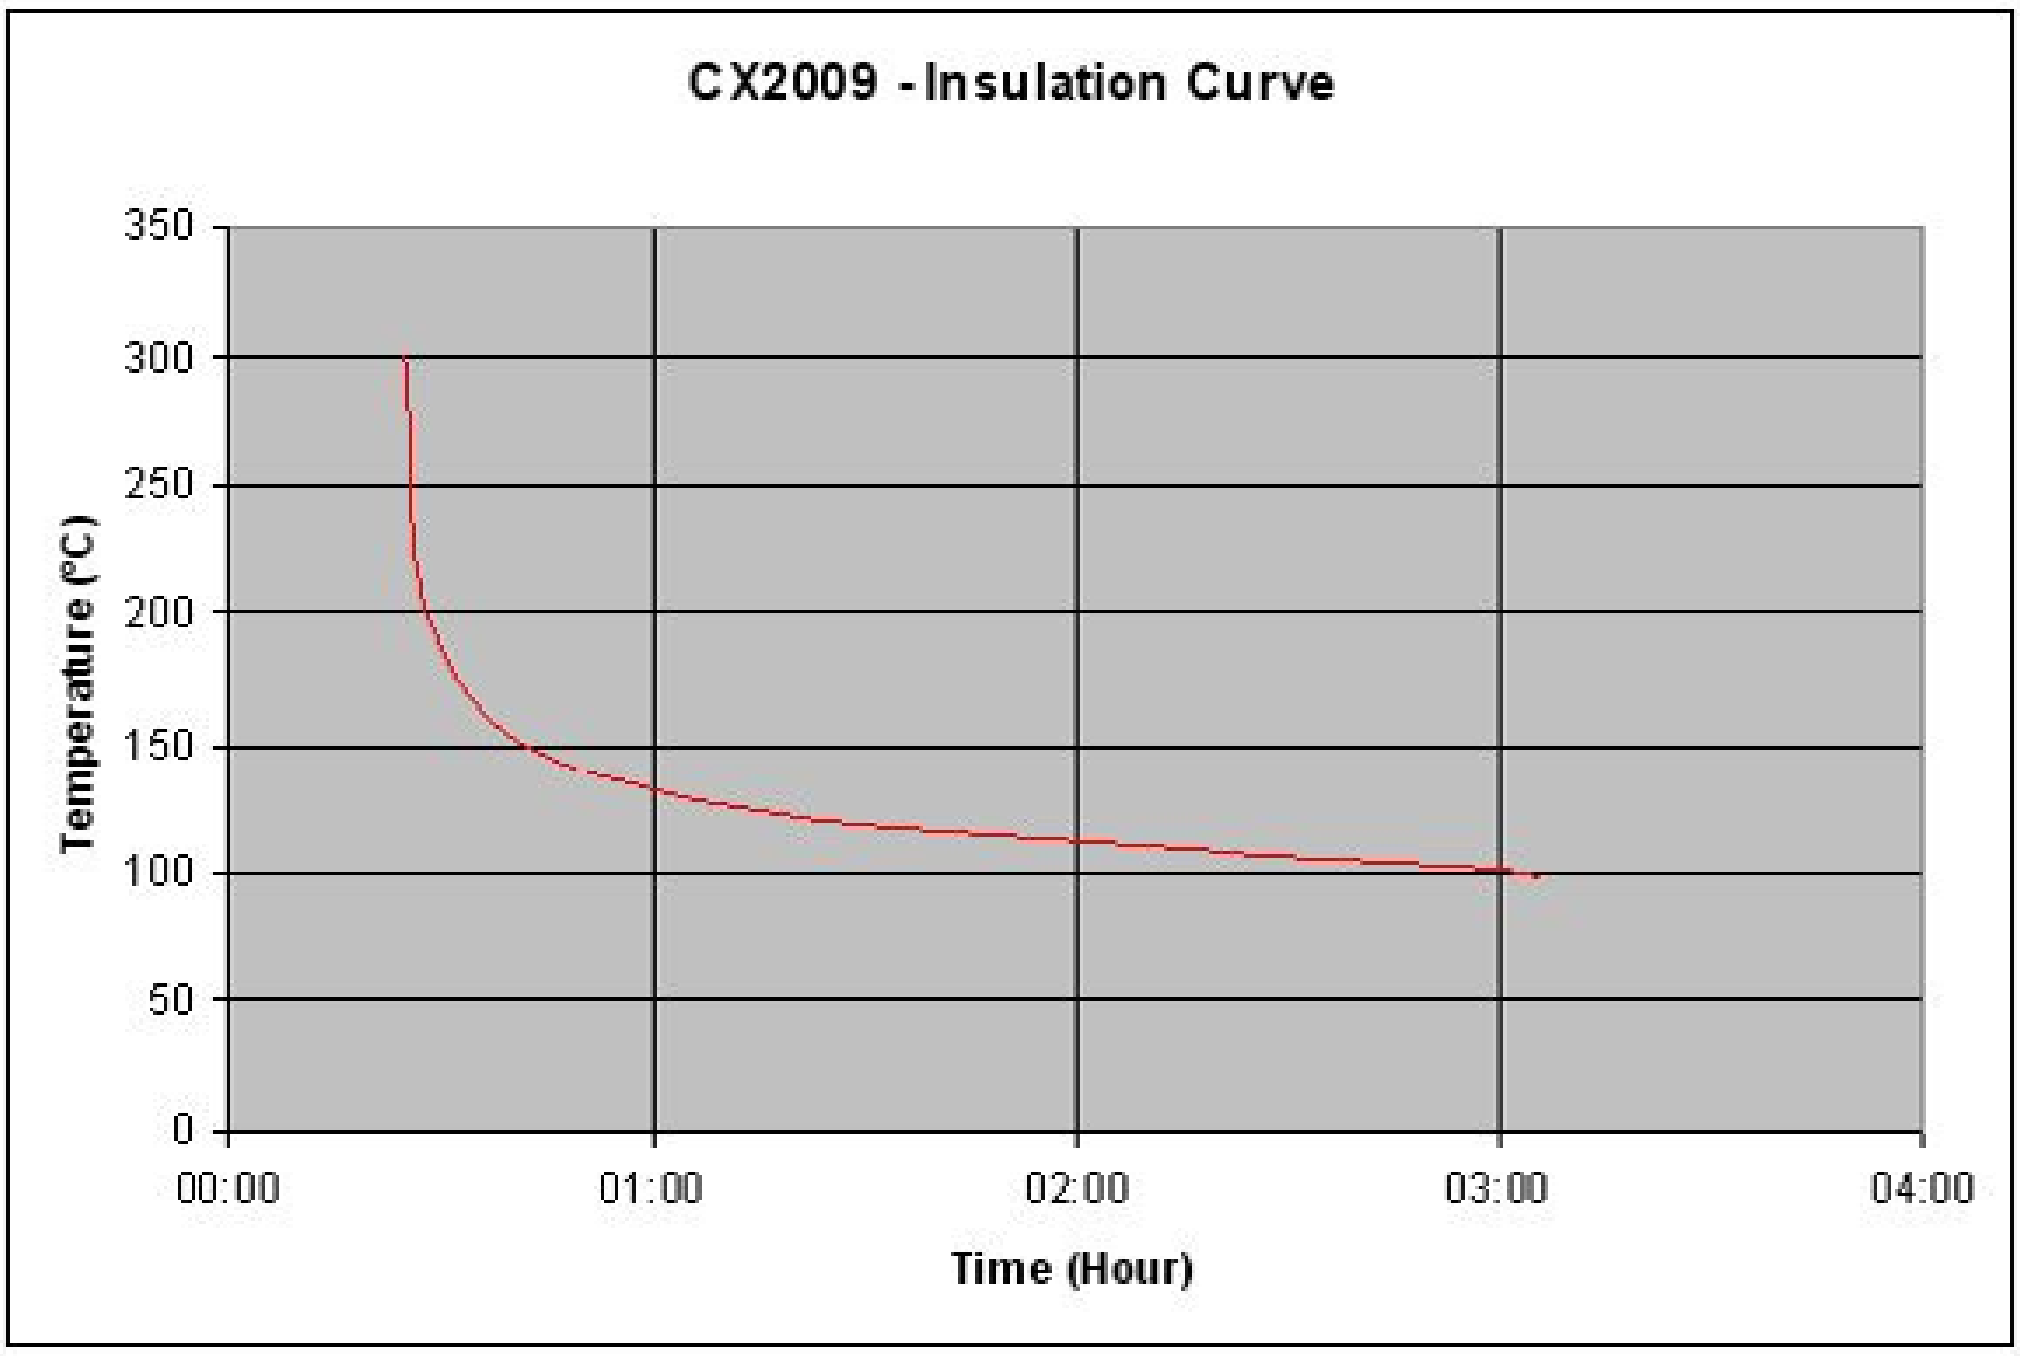

Application: The CX2009 in combination with accompanying heat sink can be used in all type of ovens, which do not exceed the temperature of 300°C (572°F).

Additional Information:

Dimensions:	Height:	60 mm (2,4 inch)
	Length:	250 mm (9,9 inch) + 30 mm (1,2 inch) - handle
	Width:	200 mm (7,9 inch)
	Weight:	3600 gram

Safety Precautions: Wear insulated gloves when handling the insulation box CX2003.
Do not exceed the specified time at temperature limits in order to protect the equipment. Do not overheat, crush, puncture, or otherwise damage the energy absorber this may result in leakage.

Disclaimer: The information given in this sheet is not intended to be exhaustive and any person using the product for any purpose other than that specifically recommended in this sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. Whilst we endeavour to ensure that all advice we give about the product (whether in this sheet or otherwise) is correct we have no control over either the quality or condition of the product or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing to do so, we do not accept any liability whatsoever or howsoever arising for the performance of the product or for any loss or damage (other than death or personal injury resulting from our negligence) arising out of the use of the product. The information contained in this sheet is liable to modification from time to time in the light of experience and our policy of continuous product development.